



**WINDA**

**TBR TYRE  
BROCHURE**

**WINDA**







# CONTENT



03-04	.....	Content
05-06	.....	Introduction
07-08	.....	Introduction&Product Range
09-10	.....	Size And Avalibility Chart
11-12	.....	WD118 WD121 WD122 WD126A
13-14	.....	WD128 WD155 WD156 WD158
15-16	.....	WD166 WD168A WD168
17-18	.....	WD168N WD188 WD212 WD212N
19-20	.....	WD215 WD215N WD216 WD217
21-22	.....	WD219 WD267 WD269 WD288
23-24	.....	WD290 WD299 WD316 WD360
25-26	.....	WD368 WD369 WD369N WD388
27-28	.....	WD388N WD389 WD398+ WD398N
29-30	.....	WD518 WD556 WD568 WD577
31-32	.....	WD588 WD666 WD668 WD688
33-34	.....	WD718 WD926 WD929 WD957
35-36	.....	WD968 WD968N WD369 WD157
37	.....	WD398



## Introduction to China Wanda Group

Located in the beautiful Yellow River Estuary and the cradle of Shengli Oil field, Dongying, Shandong, China Wanda Group was founded in 1988. China Wanda Group is entering a new development stage after passing its three-step-development of advancing by science and technology, creating advantage by brand building and developing through cooperation while holding its vision of gathering scientific and technological talents and building up Wanda foundation evergreen. During 30 years development, Wanda Group experienced its initial development phase of "Advancing by Science and Technology, Creating Advantage by Branding Building and Developing through Cooperation". The group has formed its industrial pattern of "Science and Technology Playing a Leading Role in Development, Integrating Petrochemical and Rubber Industry and Developing Diversified Business" and developed to become a large scale enterprise group with its business covering petrochemical, tires, sea terminal logistics and finance and trade etc. The group owns over 80 billion yuan total assets, covers an area of 60 billion square meters and employs over 13,000 staff and workers. The group is authorized to carry out crude oil importation and refined oil product wholesale. The group is also qualified for opening of its sea terminals to public service and outbound construction contract project. Wanda group has won many honorable titles like National May 1st Labor Award, National Contract-respect Enterprise, AAAA Class Enterprise with National Standardized Good Behaviour. The group is only one private enterprises whose parent company and its subsidiary company are evaluated AA+ Credit in Shandong Province.

For many years, Wanda Group is successively on list of China Top500 Enterprises, China Top500 Manufacturing Enterprises and China Top500 Most Competitive Enterprise Groups. Wanda Group highlighted in mixed ownership in China and run some joint ventures with some Fortunate Global 500 like Petrochina and Sinopec etc. At present, the group has established 1 National Class Enterprise Scientific Research Center, 1 National Class Post-doctoral Scientific and Research Workstation, 2 National Class labs. The group's 12 program have been included in the National Spark Program, the National Torch Program and National Hi-tech Industrial Pilot Program. The group is one of member enterprises to participate to draw and formulate some national technological process and measurement standard in some industries. The group has over 20 famous brands above the provincial level and its different products are sold to 168 countries and regions over the world.

Next step, China Wanda Group will seize the historical opportunity of our country's "the Belt & Road Initiative" and China 2025 Manufacturing" to fully push forward development in direction of innovation drive, green and low carbon and intelligent manufacturing, following the overall development thinking of "Focusing to the leading industries, Building the world famous brand, Realizing 100 billion Yuan sale revenue and building Wanda into a evergreen conglomerate".






## Introduction to Shandong Wanda Boto Tyre Co.LTD

Shandong Wanda Boto Tyre Co.LTD is one of the large enterprises in China that specializes in manufacturing TBR, OTR, PCR and light truck tires. The company employs over 3600 staff among which more than 30% are granted with colleague degree or above. Located in the beautiful Yellow river estuary-Dongying, the company is a wholly-owned subsidiary of China Wanda Group, which is one of Top 500 national industrial enterprises in economic strength. Shandong Wanda BOTO tyre Co., Ltd is a large scale of professional tire production enterprise and China Quality and Credit enterprise.

Shandong Wanda BOTO tyre Co., Ltd sincerely welcomes friends from home and abroad for export business discussion!



## PRODUCT RANGE

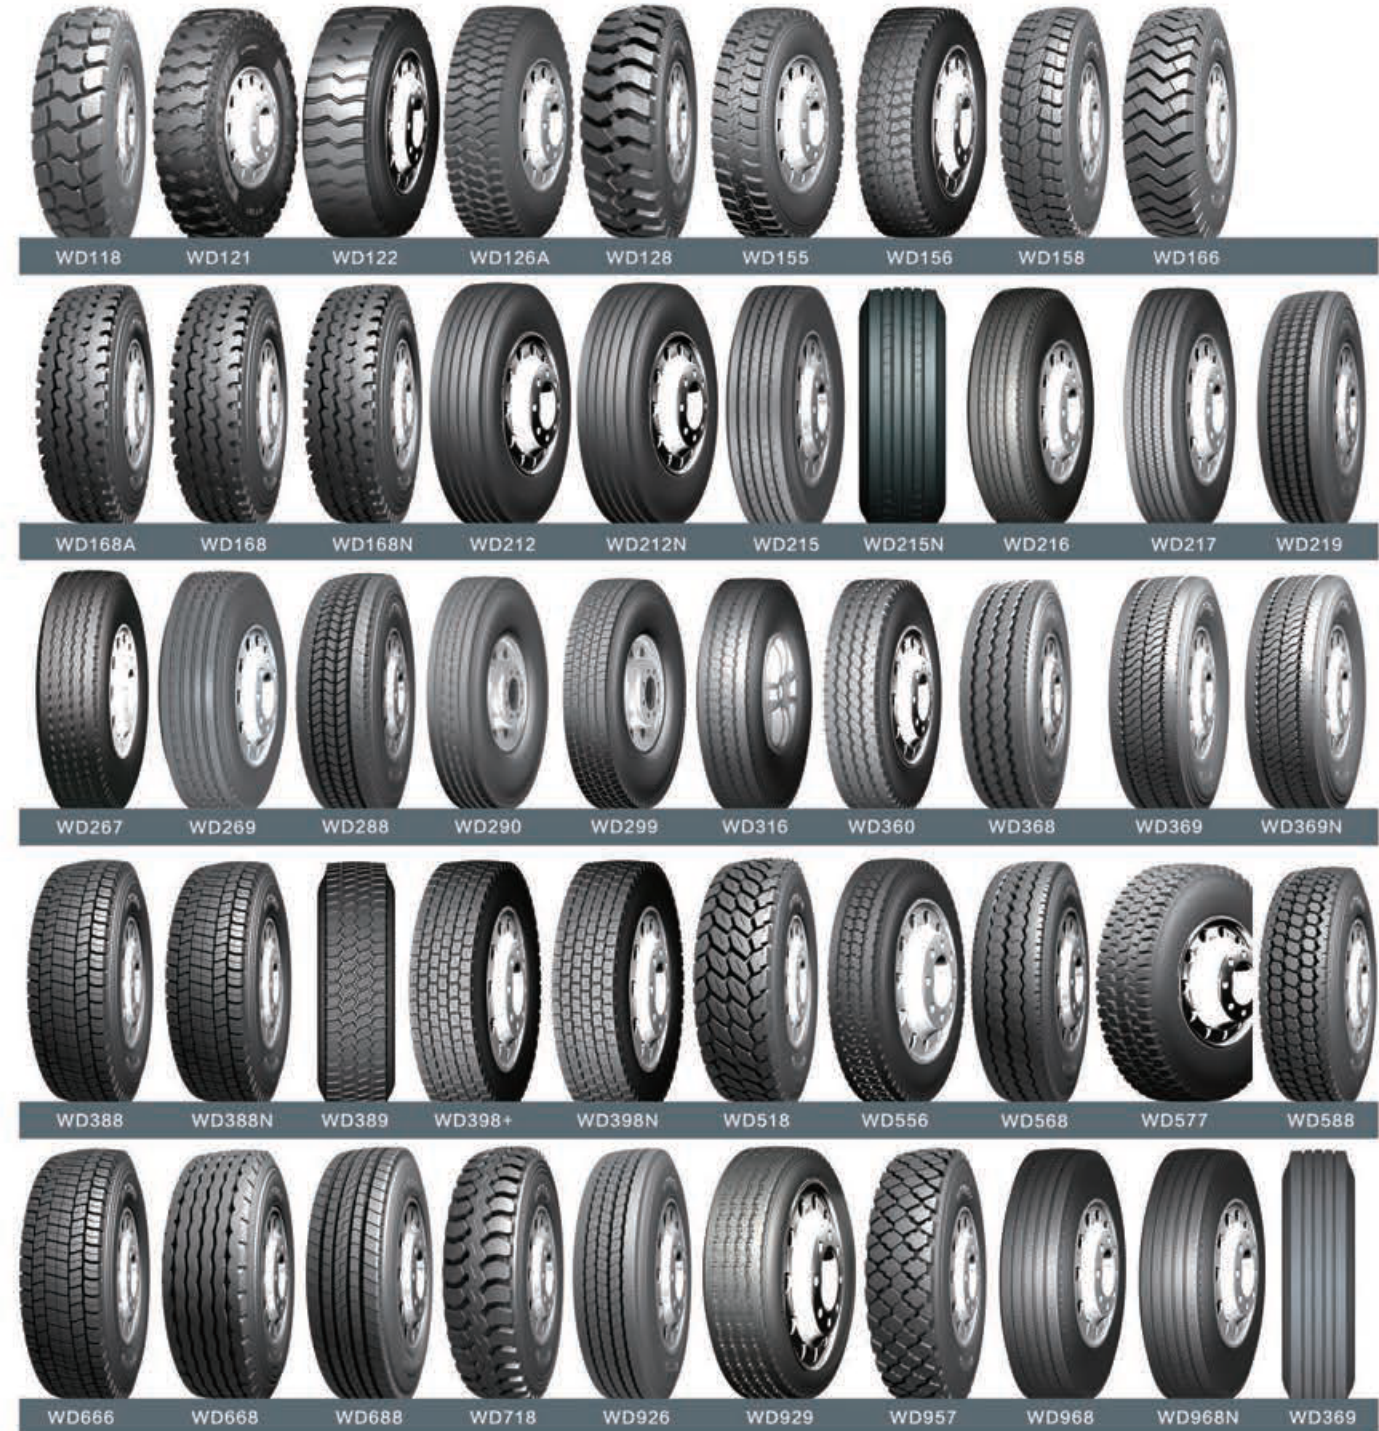










## WD118



- ▶ Mainly for drive axle, also applicable for steer wheel
- ▶ Special pattern design, only applicable to driving on mining and bad roads with low speed
- ▶ Excellent grip and ride ability performance
- ▶ The pattern is good in self-cleaning, superior for wear and puncture resistance

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX LOAD (kg)	PRESSURE	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
			SECTION WIDTH	OVERALL DIAMETER						
10.00R20	16	TT	278	1054	146/143	3000/2725	830/830	F	7.5	21
	18	TT	278	1054	149/146	3250/3000	930/930	F	7.5	
11.00R20	16	TT	293	1085	150/147	3350/3075	830/830	F	8.0	22
	18	TT	293	1085	152/149	3550/3250	930/930	F	8.0	
12.00R20	18	TT	315	1125	154/151	3750/3450	830/830	F	8.5	22
	20	TT	315	1125	156/153	4000/3650	900/900	F	8.5	



## WD122



- ▶ Mainly for driving and trailing position on mining, construction and other extremely bad road conditions with low speed
- ▶ Deeper and simple lug pattern design and unique tread compound for better anti-puncture and anti-chipping and chunking performance
- ▶ Good driving, braking and grip capability
- ▶ Optimized carcass design to ensure better loading capacity

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX LOAD (kg)	PRESSURE	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
			SECTION WIDTH	OVERALL DIAMETER						
8.25R16	16	TT	235	855	128/124	1800/1600	770/770	J	6.5H	16
8.25R20	16	TT	236	974	139/137	2430/2300	930/930	F	6.5	19
11.00R20	18	TT	293	1085	152/149	3550/3250	930/930	F	8.0	24
12.00R20	20	TT	315	1125	156/153	4000/3650	900/900	F	8.5	25



## WD121



- ▶ Mainly for all position on mining road with low speed
- ▶ Deeper lug pattern and special heat dissipation hole design in the groove ensures excellent grip, driving and heat dissipation performance
- ▶ Thickening sidewall and anti-scratch design to prevent damages to the sidewall under various abnormal conditions and ensures excellent

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX LOAD (kg)	PRESSURE	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
			SECTION WIDTH	OVERALL DIAMETER						
12.00R20	18	TT	315	1125	154/151	3750/3450	830/830	B	8.5	25
12.00R20	20	TT	315	1125	156/153	4000/3650	900/900	B	8.5	25



## WD126A



- ▶ Mainly for drive wheel
- ▶ Applicable for driving on bad road conditions, especially for mining road
- ▶ Wider and deeper pattern design with excellent grip, traction and ride ability performance
- ▶ Good cutting-resistance, anti-puncture and anti-cracking performance

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX LOAD (kg)	PRESSURE	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
			SECTION WIDTH	OVERALL DIAMETER						
12.00R20	18	TT	315	1125	154/151	3750/3450	830/830	E	8.5	30
12.00R20	22	TT	315	1125	162/158	4750/4250	930/930	B	8.5	30





## WD128



- ▶ Mainly for drive wheel
- ▶ Applicable for ride on bad roads, especially for mining road
- ▶ With excellent off-the-road, traction and ride ability performance
- ▶ Good performance in tear resistance and puncture resistance

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX.LOAD (kg)	PRESSURE	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
			SECTION WIDTH	OVERALL DIAMETER						
10.00R20	18	TT	278	1054	149/146	3250/3000	930/930	D	7.5	24
11.00R20	16	TT	293	1085	150/147	3350/3070	830/830	F	8.0	24
11.00R20	18	TT	293	1085	152/149	3550/3250	930/930	F	8.0	24
12.00R20	18	TT	315	1125	154/151	3750/3450	830/830	F	8.5	24
12.00R20	20	TT	315	1125	156/153	4000/3650	900/900	F	8.5	24



## WD155



- ▶ Mainly for medium and long haul application on ordinary highway and mixed road with low speed
- ▶ Lug, Deeper horn-like pattern design with vertical and horizontal grooves for better driving, grip, climbing and self-cleaning capability
- ▶ Optimized tire contour design, enhanced carcass and belt structure to improve the durability of the tire

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX.LOAD (kg)	PRESSURE	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
			SECTION WIDTH	OVERALL DIAMETER						
7.00R16	14	TT	200	775	118/114	1320/1180	770/770	F	5.5F	15.5
7.50R16	14	TT	215	805	122/118	1500/1320	770/770	F	6.00G	16.5
8.25R16	16	TT	235	855	128/124	1800/1600	770/770	F	6.50H	18
8.25R20	16	TT	236	974	139/137	2430/2300	930/930	F	6.5	18



## WD156



- ▶ Mainly for medium and regional application of driving and trailing axle on mixed road
- ▶ Open shoulder design for better heat dissipation
- ▶ Lug pattern for better traction, braking and wet-skid resistance performance
- ▶ Large groove in shoulder to increase heat dissipation and overloading capacity

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX.LOAD (kg)	PRESSURE	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
			SECTION WIDTH	OVERALL DIAMETER						
12.00R20	18	TT	315	1125	154/151	3750/3450	830/830	K	8.5	19.5
12.00R20	20	TT	315	1125	156/153	4000/3650	900/900	K	8.5	19.5
325/95R24	22	TT	325	1228	162/160	4750/4500	850/850	K	9	19.5



## WD158



- ▶ Mainly for drive wheel
- ▶ Applicable for driving on wet road and bad road condition
- ▶ With good grip and traction performance
- ▶ Excellent wear and puncture resistance performance

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX.LOAD (kg)	PRESSURE	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
			SECTION WIDTH	OVERALL DIAMETER						
10.00R20	18	TT	278	1054	149/146	3250/3000	930/930	J	7.5	19
11.00R20	18	TT	293	1085	152/149	3550/3250	930/930	J	8.0	20
12.00R20	18	TT	315	1125	154/151	3750/3450	830/830	K	8.5	20.5
12.00R20	20	TT	315	1125	156/153	4000/3650	900/900	J	8.5	20.5





## WD 166



- ▶ Mainly for drive axle
- ▶ Speical pattern design, applicable to driving on bad road conditions, especially mining road
- ▶ Provide excellent load capacity and long tire life
- ▶ Good wear resitance, anti-puncture and anti-cracking performance

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX.LOAD (kg)	PRESSURE	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
			SECTION WIDTH	OVERALL DIAMETER						
7.50R16	14	TT	215	805	122/118	1500/1320	770/770	L	6.00G	16
7.50R16	16	TT	215	805	124/120	1600/1405	800/800	K	6.00G	16
8.25R16	14	TT	235	855	126/122	1700./1500	670/670	L	6.50H	17
8.25R16	16	TT	235	855	128/124	1800/1600	770/770	K	6.50H	17
8.25R20	16	TT	236	974	139/137	2430/2300	930/930	K	6.5	18



## WD 168



- ▶ All position application
- ▶ Applicable to various road surfaces
- ▶ With good performance in anti-cracking and tear resistance
- ▶ The pattern is good in low heating up and high speed performance

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX.LOAD (kg)	PRESSURE	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
			SECTION WIDTH	OVERALL DIAMETER						
7.50R16LT	12	TT	215	805	120/116	1400/1250	670/670	L	6.00G	12
	14	TT	215	805	122/118	1500/1320	770/770	L	6.00G	
	16	TT	215	805	124/120	1600/1405	800/800	K	6.00G	
8.25R16LT	12	TT	235	855	123/119	1550/1360	560/560	L	6.50H	12
	14	TT	235	855	126/122	1700/1500	670/670	L	6.50H	
	16	TT	235	855	128/124	1800/1600	770/770	K	6.50H	
8.25R20	12	TT	236	974	133/131	2060/1950	720/720	L	6.5	13.5
	14	TT	236	974	136/134	2240/2120	830/830	K	6.5	
	16	TT	236	974	139/137	2430/2300	930/930	K	6.5	
9.00R20	14	TT	259	1019	141/139	2575/2430	790/790	L	7.0	15.5
	16	TT	259	1019	144/142	2800/2650	900/900	K	7.0	
10.00R20	16	TT	278	1054	146/143	3000/2725	830/830	L	7.5	16.5
	18	TT	278	1054	149/146	3250/3000	930/930	K	7.5	
11.00R20	16	TT	293	1085	150/147	3350/3075	830/830	L	8.0	17
	18	TT	293	1085	152/149	3550/3250	930/930	K	8.0	
12.00R20	16	TT	315	1125	152/149	3550/3250	760/760	L	8.5	15
	18	TT	315	1125	154/151	3750/3450	830/830	L	8.5	
12.00R24	16	TT	315	1226	156/153	4000/3650	760/760	J	8.5	17
	18	TT	315	1226	158/155	4250/3875	830/830	J	8.5	
	20	TT	315	1226	160/157	4500/4125	900/900	K	8.5	
11R22.5	14	TL	279	1054	144/142	2800/2650	720/720	M	8.25	16
	16	TL	279	1054	148/145	3150/2900	850/850	M	8.25	
12R22.5	14	TL	300	1085	146/143	3000/2725	720/720	L	9.00	17.5
	16	TL	300	1085	150/147	3350/3075	830/830	L	9.00	
	18	TL	300	1085	152/149	3550/3250	930/930	L	9.00	
13R22.5	16	TL	320	1124	152/149	3550/3250	760/760	M	9.75	15
	18	TL	320	1124	156/150	4000/3350	875/875	L	9.75	
315/80 R22.5	18	TL	312	1076	154/151	3750/3450	830/830	M	9.00	15
	20	TL	312	1076	156/150	4000/3350	850/850	M	9.00	



## WD 168A



- ▶ All position application
- ▶ Applicable to various road surfaces
- ▶ With good performance in anti-cracking and tear resistance
- ▶ The pattern is good in low heating up and high speed performance

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX.LOAD (kg)	PRESSURE	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
			SECTION WIDTH	OVERALL DIAMETER						
12.00R24	16	TT	315	1226	156/153	4000/3650	760/760	J	8.5	15
	18	TT	315	1226	158/155	4250/3875	830/830	J	8.5	
	20	TT	315	1226	160/157	4500/4125	900/900	K	8.5	





## WD168N

- ▶ All position application
- ▶ Applicable to various road surfaces
- ▶ With good performance in anti-cracking and tear resistance
- ▶ The pattern is good in low heating up and high speed performance

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX LOAD (kg)	PRESSURE	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
			SECTION WIDTH	OVERALL DIAMETER						
11R22.5	14	TL	279	1054	144/142	2800/2650	720/720	M	8.25	16
11R22.5	16	TL	279	1050	148/145	3150/2900	850/850	M	8.25	16
11R24.5	14	TL	279	1104	146/143	3000/2725	720/720	M	8.25	16
11R24.5	16	TL	279	1104	149/146	3250/3000	830/830	L	8.25	16
255/70R22.5	16	TL	279	930	140/137	2500/2300	800/800	M	7.50	16



## WD212

- ▶ Mainly for steer wheel
- ▶ Fuel saving for low rolling resistance
- ▶ Long life and smooth wear

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX LOAD (kg)	PRESSURE	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
			SECTION WIDTH	OVERALL DIAMETER						
11R22.5	14	TL	279	1054	144/142	2800/2650	720/720	M	8.25	14
	16	TL	279	1054	146/143	3000/2725	830/830	M	8.25	
11R24.5	14	TL	279	1104	146/143	3000/2725	720/720	M	8.25	14
	16	TL	279	1104	149/146	3250/3000	830/830	L	8.25	
285/75 R24.5	14	TL	283	1050	144/141	2800/2575	760/760	M	8.25	14
	16	TL	283	1050	147/144	3075/2800	830/830	L	8.25	
295/75 R22.5	14	TL	298	1014	144/141	2800/2575	760/760	M	9.00	14
	16	TL	298	1014	146/143	3000/2725	830/830	L	9.00	



## WD188

- ▶ Applicable for drive axle
- ▶ Applicable to mix and bad road surface, such as construction road
- ▶ With good grip performance
- ▶ Good wear resistance and long mileage

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX LOAD (kg)	PRESSURE	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
			SECTION WIDTH	OVERALL DIAMETER						
9.00R20	16	TT	259	1019	144/142	2800/2650	900/900	F	8.0	22
10.00R20	16	TT	278	1054	146/143	3000/2725	830/830	G	7.5	19.5
	18	TT	278	1054	149/146	3250/3000	930/930	G	7.5	
11.00R20	18	TT	293	1085	152/149	3550/3250	930/930	J	8.0	22
12.00R20	18	TT	315	1125	154/151	3750/3450	830/830	F	8.5	22
	20	TT	315	1125	156/153	4000/3650	900/900	F	8.5	
13R22.5	16	TL	320	1124	154/151	3750/3450	830/830	F	9.75	22
	18	TL	320	1124	156/150	4000/3350	875/875	K	9.75	
11R22.5	14	TL	279	1054	144/142	2800/2650	720/720	G	8.25	24.5
	16	TL	279	1054	146/143	3000/2725	830/830	G	8.25	
11R24.5	14	TL	279	1104	146/143	3000/2725	720/720	G	8.25	24.5
	16	TL	279	1104	149/146	3250/3000	830/830	G	8.25	



## WD212N

- ▶ Mainly for rated load and long haul application of all position wheels, especially for steer and trailer wheels.
- ▶ Applicable for good road at high speed.
- ▶ Four straight grooves design offers excellent handling and water drainage performance.
- ▶ With cross sipe design to generate a good grip and low heating up performance.

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX LOAD (kg)	PRESSURE	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
			SECTION WIDTH	OVERALL DIAMETER						
11R22.5	14	TL	279	1054	144/142	2800/2650	720/720	M	8.25	14
	16	TL	279	1054	146/143	3000/2725	830/830	M	8.25	
11R24.5	14	TL	279	1104	146/143	3000/2725	720/720	M	8.25	14
	16	TL	279	1104	149/146	3250/3000	830/830	L	8.25	
285/75 R24.5	14	TL	283	1050	144/141	2800/2575	760/760	M	8.25	14
	16	TL	283	1050	147/144	3075/2800	830/830	L	8.25	
295/75 R22.5	14	TL	298	1014	144/141	2800/2575	760/760	M	9.00	14
	16	TL	298	1014	146/143	3000/2725	830/830	L	9.00	
255/70 R22.5	14	TL	255	930	136/133	2240/2060	700/700	M	7.50	14
	16	TL	255	930	140/137	2500/2300	800/800	M	7.50	





## WD215



- ▶ Mainly for directional and steel axle for long distance transport
- ▶ Applicable for high way and good road surface with high speed;
- ▶ With excellent wear resistance and anti-skidding
- ▶ With low heating up, good high speed and safty performance.

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE SINGLE/DUAL (kpa)	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
			SECTION WIDTH	OVERALL DIAMETER						
275/70 R22.5	18	TL	276	958	148/145	3150/2900	900/900	J	8.25	19.2
425/65 R22.5	20	TL	430	1124	165	5150	825	K	13.00	15
385/55 R22.5	18	TL	386	996	158	4250	850	L	12.25	15
	20	TL	386	996	160	4500	900	K	12.25	
435/50 R19.5	18	TL	438	931	156	4000	850	K	14.00	14
	20	TL	438	931	160	4500	900	J	14.00	
ST225/90 R16	14	TL	220	808	128/124	1800/1600	830/830	K	6.00	12
ST235/85 R16	14	TL	235	806	132/127	2000/1750	760/760	L	6.50	9.5



## WD216



- ▶ Mainly for long haul application of light truck and all positions wheels on good road
- ▶ Four longitudinal grooves design exactly accords with the quick movement feature of light truck
- ▶ Low heating up compound ensures good wear resistance and fuel saving
- ▶ Continuous pattern in the shoulder avoids tire irregular wear

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE SINGLE/DUAL (kpa)	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
			SECTION WIDTH	OVERALL DIAMETER						
7.50R16LT	12	TT	215	805	120/116	1400/1250	670/670	L	6.00G	12
	14	TT	215	805	122/118	1500/1320	770/770	L	6.00G	
	16	TT	215	805	124/120	1600/1405	800/800	K	6.00G	



## WD215N



- ▶ Mainly for rated load and long haul application of trailers.
- ▶ For high speed riding on good roads.
- ▶ Zigzag shape main slots design enhances handling performance and service life.
- ▶ With high irregular wear resistance technology.

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE SINGLE/DUAL (kpa)	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
			SECTION WIDTH	OVERALL DIAMETER						
385/65 R22.5	18	TL	389	1072	158	4250	830	L	11.75	15
	20	TL	389	1072	160	4500	900	K	11.75	



## WD217



- ▶ Mainly for standard load, medium and long-haul application of steering axle on paved and first grade highway
- ▶ Longitudinal groove design for better handling performance
- ▶ Sepcial steel sheet design to reduced stone holding and improved stone rejection performance
- ▶ Wide section design to enlarge ground contact area for better anti-wearance performance

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE SINGLE/DUAL (kpa)	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
			SECTION WIDTH	OVERALL DIAMETER						
6.50R16	12	TT	185	750	110/115	1060/925	670/670	L	5.5F	12
7.00R16	12	TT	200	775	115/110	1215/1060	670/670	M	5.5F	13
7.00R16	14	TT	200	775	118/114	1320/1180	770/770	L	5.5F	13



## WD219



- ▶ This pattern has low heating up and low rolling resistance performance
- ▶ Applicable for high speed ride on highway and good roads
- ▶ With wide tread design to extend tire service life
- ▶ This pattern has performance in low heating up and rolling resistance

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX LOAD (kg)	PRESSURE	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
			SECTION WIDTH	OVERALL DIAMETER						
11R22.5	14	TL	279	1054	144/142	2800/2650	720/720	M	8.25	14.8
	16	TL	279	1054	146/143	3000/2725	830/830	M	8.25	
12R22.5	18	TL	300	1085	150/149	3550/3250	930/930	L	9.0	14.8
	16	TL	298	1044	150/147	3350/3075	830/830	L	9.00	
295/80 R22.5	18	TL	298	1044	152/149	3550/3250	900/900	M	9.00	14.8
	20	TL	312	1076	154/151	3750/3450	830/830	M	9.00	
315/80 R22.5	18	TL	312	1076	156/150	4000/3350	850/850	L	9.00	15.5
	20	TL	312	1076	156/150	4000/3350	850/850	L	9.00	
275/80 R22.5	14	TL	276	1012	145/143	2900/2725	750/750	L	8.25	15.0
	16	TL	276	1012	149/146	3250/3000	850/850	L	8.25	
295/60 R22.5	16	TL	292	926	149/146	3250/3000	900/900	L	9.00	14.8
	18	TL	292	926	150/147	3350/3075	900/900	K	9.00	
315/60 R22.5	16	TL	313	950	152/148	3550/3150	900/900	L	9.75	14.8

## WD267



- ▶ All-wheeled vehicles with long distance and high speed driving on good paved road
- ▶ With superior traction, steering, good grip and anti-slip performance
- ▶ Pattern design making tires have low noise, energy saving;
- ▶ Wear-resistant tread formula

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX LOAD (kg)	PRESSURE	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
			SECTION WIDTH	OVERALL DIAMETER						
385/65R22.5	20	TT	389	1072	160	4500	900	K	11.75	17
					164	5000	900			

## WD269



- ▶ All position application, especially for steer and trailer wheel
- ▶ With good performance in water drainage and anti-skid of lateral spreads
- ▶ The pattern has excellent performance in irregular wear resistance
- ▶ Help to prevent stones from lodging in grooves and drilling into belts, reducing casing life

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX LOAD (kg)	PRESSURE	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
			SECTION WIDTH	OVERALL DIAMETER						
11.00R20	16	TT	293	1085	150/147	3350/3075	830/830	L	8.0	15.5
					152/149	3550/3250	930/930			

## WD288



- ▶ Low heat build-up
- ▶ All position application
- ▶ Applicable to normal and good road
- ▶ with good anti-skid and irregular wear resistance
- ▶ the pattern is in low heating up and rolling resistance

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX LOAD (kg)	PRESSURE	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
			SECTION WIDTH	OVERALL DIAMETER						
7.50R16LT	12	TT	215	805	120/116	1400/1250	670/670	L	6.00G	11
					122/118	1500/1320	770/770			
					124/120	1600/1405	800/800			
8.25R16LT	12	TT	235	855	123/119	1550/1360	560/560	L	6.50H	12
					126/122	1700/1500	670/670			
					128/124	1800/1600	770/770			





## WD290



- ▶ All position application, especially for steer and trailer wheel
- ▶ With good performance in water drainage and anti-skid of lateral spreads
- ▶ The pattern has excellent performance in irregular wear resistance
- ▶ Help to prevent stones from lodging in grooves and drilling into belts, reducing casing life

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX LOAD (kg)	PRESSURE	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
			SECTION WIDTH	OVERALL DIAMETER						
11.00R20	16	TT	293	1085	150/147	3350/3075	830/830	L	8.0	15.5
	18	TT	293	1085	152/149	3550/3250	930/930	K	8.0	



## WD316



- ▶ Designed as an all position tyre for on/off road service
- ▶ Provides excellent overall performance and durability. In addition, offers enhanced tyre life with superior resistance to irregular wear a wider tread and groove angles

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX LOAD (kg)	PRESSURE	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
			SECTION WIDTH	OVERALL DIAMETER						
325/95R24	22	TT	325	1228	162/160	4750/4500	850/850	K	9.00	17



## WD299



- ▶ All position application, especially for steer and trailer wheel
- ▶ Good in water drainage and traction performance
- ▶ With excellent irregular wear resistance performance

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX LOAD (kg)	PRESSURE	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
			SECTION WIDTH	OVERALL DIAMETER						
11.00R20	16	TT	293	1085	150/147	3350/3075	830/830	L	8.0	15.5
	18	TT	293	1085	152/149	3550/3250	930/930	K	8.0	



## WD360



- ▶ For all position wheels
- ▶ Designed for light truck, agricultural vehicles and light dump truck
- ▶ Excellent traction performance
- ▶ Low heating up shoulder design

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX LOAD (kg)	PRESSURE	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
			SECTION WIDTH	OVERALL DIAMETER						
6.50R16LT	10	TT	185	750	107/102	975/850	560/560	M	5.50F	12
	12	TT	185	750	110/105	1060/925	670/670	L	5.50F	
7.00R16LT	12	TT	200	775	115/110	1215/1060	670/670	M	5.50F	14
	14	TT	200	775	118/114	1320/1180	770/770	L	5.50F	
12R22.5	18	TT	300	1085	152/149	3550/3250	930/930	L	9	17
13R22.5	20	TT	320	1124	156/153	4000/3650	930/930	K	9.75	17
315/80R22.5	20	TT	312	1076	156/150	4000/3350	850/850	L	9	15.5





## WD368



- ▶ For regional application of steer and trailer wheels
- ▶ Applicable for driving on normal and good road
- ▶ With good performance in water drainage and anti-skid of lateral spreads
- ▶ With excellent irregular wear resistance performance

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE SINGLE/DUAL (kpa)	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
			SECTION WIDTH	OVERALL DIAMETER						
10.00R20	18	TT	278	1054	149/146	3250/3000	930/930	K	7.5	15
11.00R20	16	TT	293	1085	150/147	3350/3070	830/830	L	8.0	15.5
11.00R20	18	TT	293	1085	152/149	3550/3250	930/930	K	8.0	15.5
12.00R20	18	TT	315	1125	154/151	3750/3450	830/830	L	8.5	16
12.00R20	20	TT	315	1125	156/153	4000/3650	900/900	K	8.5	16



## WD369N



- ▶ For long haul application of truck and all positions wheels on good roads
- ▶ With wide tread design to extend tire service life
- ▶ With excellent water drainage and heat dispersion performance
- ▶ This pattern has good performance in low heating up and rolling resistance

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE SINGLE/DUAL (kpa)	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
			SECTION WIDTH	OVERALL DIAMETER						
11R22.5	14	TL	279	1054	144/142	2800/2650	720/720	L	8.25	17.5
11R22.5	16	TL	279	1054	146/143	3000/2725	830/830	L	8.25	17.5



## WD369



- ▶ For long haul application of truck and all positions wheels on good roads
- ▶ With wide tread design to extend tire service life
- ▶ With excellent water drainage and heat dispersion performance
- ▶ This pattern has performance in low heating up and rolling resistance

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE SINGLE/DUAL (kpa)	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
			SECTION WIDTH	OVERALL DIAMETER						
11R22.5	14	TL	279	1054	144/142	2800/2650	720/720	L	8.25	17.5
	16	TL	279	1054	146/143	3000/2725	830/830	L	8.25	
295/80 R22.5	16	TL	298	1044	150/147	3350/3075	830/830	L	9.00	18
	18	TL	298	1044	152/149	3550/3250	900/900	M	9.00	
315/80 R22.5	18	TL	312	1076	154/151	3750/3450	830/830	M	9.00	18
	20	TL	312	1076	156/150	4000/3350	850/850	L	9.00	



## WD388



- ▶ For regional application of drive axle
- ▶ Applicable to various road surface on freeway
- ▶ With good grip and traction performance
- ▶ Excellent wear resistance and long mileage

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE SINGLE/DUAL (kpa)	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
			SECTION WIDTH	OVERALL DIAMETER						
11R22.5	14	TL	279	1054	144/142	2800/2650	720/720	M	8.25	20
	16	TL	279	1050	148/145	3150/2900	850/850	M	8.25	
295/80 R22.5	16	TL	298	1044	150/147	3350/3075	830/830	L	9.00	20.5
	18	TL	298	1044	152/149	3550/3250	900/900	M	9.00	
315/70 R22.5	16	TL	312	1014	149/146	3250/3000	760/760	L	9.00	19
	18	TL	312	1014	154/150	3450/3150	830/830	M	9.00	
315/80 R22.5	18	TL	312	1076	154/151	3750/3450	830/830	M	9.00	21
	20	TL	312	1076	156/150	4000/3350	850/850	L	9.00	





## WD388N



- ▶ For regional application of drive axle
- ▶ Applicable to various road surface on freeway
- ▶ With good grip and traction performance
- ▶ Excellent wear resistance and long mileage

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX LOAD (kg)		PRESSURE		SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
			SECTION WIDTH	OVERALL DIAMETER		SINGLE/DUAL	SINGLE/DUAL	SINGLE/DUAL (kpa)				
12R22.5	18	TL	300	1085	152/149	3550/3250	930/930	L	9.0			20
295/80 R22.5	16	TL	298	1044	150/147	3350/3075	830/830	L	9.00			21
	18	TL	298	1044	152/149	3550/3250	900/900	M	9.00			
315/80 R22.5	18	TL	312	1076	154/151	3750/3450	830/830	M	9.00			21
	20	TL	312	1076	156/150	4000/3350	850/850	L	9.00			



## WD398+



- ▶ Mainly used for drive wheel
- ▶ For long hual application on paved road
- ▶ Deep tread depth and wide tread crown offers long mileage
- ▶ Unique tread block ensures good traction and brake performance

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX LOAD (kg)		PRESSURE		SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
			SECTION WIDTH	OVERALL DIAMETER		SINGLE/DUAL	SINGLE/DUAL	SINGLE/DUAL (kpa)				
12R22.5	16	TL	300	1085	150/147	3350/3075	830/830	L	9.0			24
12R22.5	18	TL	300	1085	152/149	3550/3250	930/930	L	9.0			24
315/80R22.5	20	TL	312	1076	156/150	4000/3350	850/850	L	9.0			24



## WD389



- ▶ Snow tyre
- ▶ Mainly for regional, medium and long hual application of all position on national and provincial highway
- ▶ Deeper pattern design and completely independent block design for more powerful drive and braking performance, resulting in higher tire safety factor

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX LOAD (kg)		PRESSURE		SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
			SECTION WIDTH	OVERALL DIAMETER		SINGLE/DUAL	SINGLE/DUAL	SINGLE/DUAL (kpa)				
11R22.5	14	TL	279	1054	144/142	2800/2650	720/720	M	8.25			21
	16	TL	279	1054	146/143	3000/2725	830/830	L	8.25			21
11R24.5	14	TL	279	1104	146/143	3000/2725	720/720	M	8.25			21
	16	TL	279	1104	149/146	3250/3000	830/830	L	8.25			21



## WD398N



- ▶ Mainly used for drive wheel
- ▶ For long hual application on normal and good roads
- ▶ With good grip and traction performance
- ▶ The pattern has good performance in low heating up and carrying capacity

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX LOAD (kg)		PRESSURE		SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
			SECTION WIDTH	OVERALL DIAMETER		SINGLE/DUAL	SINGLE/DUAL	SINGLE/DUAL (kpa)				
10.00R20	18	TT	278	1054	149/146	3250/3000	930/930	k	7.50			18





## WD518



- ▶ All position application
- ▶ Mainly for good road surface
- ▶ With good grip and excellent traction performance
- ▶ The pattern has good performance in low heating up and carrying capacity

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX LOAD (kg)	PRESSURE	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
			SECTION WIDTH	OVERALL DIAMETER						
385/65 R22.5	18	TL	389	1072	158	4250	830	L	11.75	17
	20	TL	389	1072	160	4500	900	k	11.75	17



## WD568



- ▶ All position application
- ▶ Applicable for mix and bad road condition
- ▶ With good performance in anti-cracking and tear resistance
- ▶ The pattern has excellent performance in irregular wear resistance

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX LOAD (kg)	PRESSURE	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
			SECTION WIDTH	OVERALL DIAMETER						
10.00R20	16	TT	278	1054	146/143	3000/2725	830/830	L	7.5	16.5
	18	TT	278	1054	149/146	3250/3000	930/930	K	7.5	
12.00R24	20	TT	315	1226	160/157	4500/4125	900/900	k	8.5	15



## WD556



- ▶ Close shoulder design
- ▶ Mainly for drive wheel
- ▶ Fuel saving for low rolling resistance
- ▶ Excellent water drainage
- ▶ Excellent grip and traction performance

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX LOAD (kg)	PRESSURE	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
			SECTION WIDTH	OVERALL DIAMETER						
11R22.5	14	TL	279	1054	144/142	2800/2650	720/720	L	8.25	20.5
	16	TL	279	1054	146/143	3000/2725	830/830	L	8.25	
11R24.5	14	TL	279	1104	146/143	3000/2725	720/720	L	8.25	20.5
	16	TL	279	1104	149/146	3250/3000	830/830	L	8.25	
285/75 R24.5	14	TL	283	1050	144/141	2800/2575	760/760	L	8.25	20.5
	16	TL	283	1050	147/144	3075/2800	830/830	L	8.25	
295/75 R22.5	14	TL	298	1014	144/141	2800/2575	760/760	L	9.00	20.5
	16	TL	298	1014	146/143	3000/2725	830/830	L	9.00	
255/70 R22.5	14	TL	255	930	136/133	2240/2060	700/700	M	7.50	20.5
	16	TL	255	930	140/137	2500/2300	800/800	M	7.50	



## WD577



- Mainly for drive wheels.
- Open shoulder design with excellent low heating up.
- Aggressive traction pattern for solid grip in rain, mud and snow.

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX LOAD (kg)	PRESSURE	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
			SECTION WIDTH	OVERALL DIAMETER						
11R22.5	14	TL	279	1054	144/142	2800/2650	720/720	L	8.25	20.5
	16	TL	279	1054	146/143	3000/2725	830/830	L	8.25	
11R24.5	14	TL	279	1104	146/143	3000/2725	720/720	L	8.25	20.5
	16	TL	279	1104	149/146	3250/3000	830/830	L	8.25	
285/75 R24.5	14	TL	283	1050	144/141	2800/2575	760/760	L	8.25	20.5
	16	TL	283	1050	147/144	3075/2800	830/830	L	8.25	
295/75 R22.5	14	TL	298	1014	144/141	2800/2575	760/760	L	9.00	20.5
	16	TL	298	1014	146/143	3000/2725	830/830	L	9.00	





## WD588



- ▶ For regional application of drive axle
- ▶ Applicable for mud and snow road
- ▶ Excellent grip and traction performance
- ▶ This pattern has low heating up and good high speed performance

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX LOAD (kg)	PRESSURE	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
			SECTION WIDTH	OVERALL DIAMETER						
11R22.5	14	TL	279	1054	144/142	2800/2650	720/720	M	8.25	20
	16	TL	279	1050	148/145	3150/2900	850/850	M	8.25	
11R24.5	14	TL	279	1104	146/143	3000/2725	720/720	M	8.25	20
	16	TL	279	1104	149/146	3250/3000	830/830	L	8.25	
295/80 R22.5	16	TL	298	1044	150/147	3350/3075	830/830	L	9.00	21
	18	TL	298	1044	152/149	3550/3250	900/900	M	9.00	
315/80 R22.5	18	TL	312	1076	154/151	3750/3450	830/830	M	9.00	21
	20	TL	312	1076	156/150	4000/3350	850/850	L	9.00	



## WD668



- ▶ Good loading capacity, low rolling resistance and low noise
- ▶ With excellent water drainage and skid resistance
- ▶ Mainly for regional transportation of trailer axle, also applicable for steer axle
- ▶ Applicable for medium and high speed transportation on normal and good roads

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX LOAD (kg)	PRESSURE	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
			SECTION WIDTH	OVERALL DIAMETER						
385/65 R22.5	18	TL	389	1072	158	4250	830	L	11.75	15
	20	TL	389	1072	160	4500	900	K	11.75	



## WD666



- ▶ All wheel position applicable for long or medium distance travel
- ▶ Providing well balanced overall performance and durability
- ▶ Wider tread and scientific groove angles offer long life and superior resistance to irregular wear

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX LOAD (kg)	PRESSURE	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
			SECTION WIDTH	OVERALL DIAMETER						
325/95R24	22	TT	325	1228	162/160	4750/4500	850/850	K	9	17



## WD688




- ▶ Mainly for steer axle, especially applicable for high way and urban roads
- ▶ Applicable for normal and good road surface
- ▶ With good stable ability and wear resistance
- ▶ Comfortable and fuel saving

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX LOAD (kg)	PRESSURE	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
			SECTION WIDTH	OVERALL DIAMETER						
275/70 R22.5	14	TL	276	958	142/139	2850/2430	760/760	M	8.25	14.8
	16	TL	276	958	144/141	2800/2575	830/830	M	8.25	
315/70 R22.5	16	TL	312	1014	149/146	3250/3000	760/760	L	9.00	15
	18	TL	312	1014	154/150	3450/3150	830/830	M	9.00	





## WD718



- ▶ For regional application of drive axle
- ▶ Applicable for mud and snow road
- ▶ Excellent grip and traction performance
- ▶ This pattern has low heating up and good high speed performance

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX LOAD (kg)		PRESSURE	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
			SECTION WIDTH	OVERALL DIAMETER		SINGLE/DUAL	SINGLE/DUAL (kg)				
7.50R16LT	12	TT	215	805	120/116	1400/1250	670/670	L	6.00G	13.5	
	14	TT	215	805	122/118	1500/1320	770/770	L	6.00G		
	16	TT	215	805	124/120	1600/1405	800/800	K	6.00G		
8.25R16LT	12	TT	235	855	123/119	1550/1360	560/560	L	6.50H	15	
	14	TT	235	855	126/122	1700/1500	670/670	L	6.50H		
	16	TT	235	855	128/124	1800/1600	770/770	K	6.50H		
9.00R20	14	TT	259	1019	141/139	2575/2430	790/790	K	7.0	17	
	16	TT	259	1019	144/142	2800/2650	900/900	K	7.0		
10.00R20	16	TT	278	1054	146/143	3000/2725	830/830	K	7.5	18	
	18	TT	278	1054	149/146	3250/3000	930/930	K	7.5		



## WD929



- ▶ All positions wheels on good road
- ▶ Excellent high speed performance and good grip both on dry and wet road
- ▶ Good wear resistance and fuel saving
- ▶ Continuous pattern in the shoulder avoids tire irregular wear

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX LOAD (kg)		PRESSURE	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
			SECTION WIDTH	OVERALL DIAMETER		SINGLE/DUAL	SINGLE/DUAL (kg)				
265/70 R19.5	14	TL	262	876	140/138	2500/2360	850/850	L	7.50	13.5	
	18	TL	262	876	143/141	2725/2575	850/850	J	7.50		



## WD926



- ▶ Mainly for long haul application of steer and trailer wheels
- ▶ Applicable for high speed riding on highway and good roads
- ▶ With excellent water drainage and heat dispersion performance
- ▶ This pattern has performance in low heating up and low noise

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX LOAD (kg)		PRESSURE	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
			SECTION WIDTH	OVERALL DIAMETER		SINGLE/DUAL	SINGLE/DUAL (kg)				
215/75 R17.5	14	TL	211	767	125/122	1650/1500	760/760	M	6.00	13	
	16	TL	211	767	127/124	1750/1600	830/830	J	6.00		
225/70 R19.5	12	TL	226	811	125/123	1650/1550	660/660	M	6.75	13.5	
	14	TL	226	811	128/126	1800/1700	760/760	M	6.75		
235/75 R17.5	12	TL	233	797	124/121	1600/1450	660/660	M	6.75	13.5	
	14	TL	233	797	129/126	1850/1700	760/760	M	6.75		
	16	TL	233	797	132/129	2000/1850	830/830	J	6.75		
245/70 R19.5	14	TL	248	839	133/131	2060/1950	760/760	M	7.50	13.5	
	16	TL	248	839	135/133	2180/2060	830/830	L	7.50		
9.5R17.5	18	TL	240	842	143/141	2725/2575	875/875	M	6.75	12.5	



## WD957



- ▶ Mainly for drive wheels
- ▶ Applicable for medium and high speed riding on normal and good roads
- ▶ With excellent grip and traction performance
- ▶ This pattern has good performance in low heating up and carrying capacity

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX LOAD (kg)		PRESSURE	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
			SECTION WIDTH	OVERALL DIAMETER		SINGLE/DUAL	SINGLE/DUAL (kg)				
215/75 R17.5	14	TL	211	767	125/122	1650/1500	760/760	M	6.00	14.5	
	16	TL	211	767	127/124	1750/1600	830/830	J	6.00		
225/70 R19.5	12	TL	226	811	125/123	1650/1550	660/660	M	6.75	15	
	14	TL	226	811	128/126	1800/1700	760/760	L	6.75		
235/75 R17.5	12	TL	233	797	124/121	1600/1450	660/660	M	6.75	15.4	
	14	TL	233	797	129/126	1850/1700	760/760	M	6.75		
	16	TL	233	797	132/129	2000/1850	830/830	J	6.75		
245/70 R19.5	14	TL	248	839	133/131	2060/1950	760/760	M	7.50	16	
	16	TL	248	839	135/133	2180/2060	830/830	L	7.50		
265/70R19.5	18	TL	262	876	143/141	2725/2575	850/850	J	7.50	15.5	
9.5R17.5	18	TT	240	842	143/141	2725/2575	875/875	K	6.75	15.5	





## WD968



- ▶ Mainly for long haul application of steer wheel, also applicable for trailer wheels
- ▶ Applicable to ride on high way and good road with high speed
- ▶ With good performance of water drainage and skid resistance
- ▶ This pattern has low heating up and low rolling resistance performance

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX LOAD (kg)	PRESSURE	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
			SECTION WIDTH	OVERALL DIAMETER						
295/80 R22.5	16	TL	298	1044	150/147	3350/3075	830/830	M	9.00	15
	18	TL	298	1044	152/149	3550/3250	900/900	M	9.00	
315/80 R22.5	18	TL	312	1076	154/151	3750/3450	830/830	M	9.00	15
	20	TL	312	1076	156/150	4000/3350	850/850	L	9.00	



## WS369



- ▶ Green tyre with low rolling resistance, mainly for steering position
- ▶ Good fuel-saving capability to reduce carbon dioxide and other greenhouse gases emission
- ▶ The tread rubber has good drainage and grip performance, thus significantly improving the tire grip capability

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX LOAD (kg)	PRESSURE	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
			SECTION WIDTH	OVERALL DIAMETER						
11R22.5	14	TL	279	1054	144/142	2800/2650	720/720	M	8.25	14
11R22.5	16	TL	279	1054	146/143	3000/2725	830/830	M	8.25	14
11R24.5	14	TL	279	1104	146/143	3000/2725	720/720	M	8.25	14
11R24.5	16	TL	279	1104	149/146	3250/3000	830/830	L	8.25	14
285/75R24.5	14	TL	283	1050	144/141	2800/2575	760/760	M	8.25	14
285/75R24.5	16	TL	283	1050	147/144	3075/2800	830/830	L	8.25	14
295/75R22.5	14	TL	298	1014	144/141	2800/2575	760/760	M	9.00	14
295/75R22.5	16	TL	298	1014	146/143	3000/2725	830/830	L	9.00	14



## WD968N



- ▶ Mainly for long haul application of steer wheel, also applicable for trailer wheels
- ▶ Applicable to ride on high way and good road with high speed
- ▶ With good performance of water drainage and skid resistance
- ▶ This pattern has low heating up and low rolling resistance performance

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX LOAD (kg)	PRESSURE	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
			SECTION WIDTH	OVERALL DIAMETER						
295/80R2.5	18	TL	298	1044	152/149	3550/3250	900/900	M	9.00	15



## WD157



- ▶ Drive wheel application
- ▶ Mainly for regional and medium haul on mixed road condition
- ▶ Directed and mixed pattern with strengthening rib for good drive and brake performance
- ▶ Deep tread to extend tire service life
- ▶ Improved carcass instructure design for good carrying capacity

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX LOAD (kg)	PRESSURE	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
			SECTION WIDTH	OVERALL DIAMETER						
10.00R20	18	TT	278	1054	149/146	3250/3000	930/930	K	7.50	19
12.00R24	20	TT	315	1226	160/157	4500/4125	900/900	K	8.50	19





**WD398** 

- ▶ Mainly used for drive wheel
- ▶ For long haul application on normal and good roads
- ▶ With good grip and traction performance
- ▶ The pattern has good performance in low heating up and carrying capacity

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX.LOAD (kg) SINGLE/DUAL (kg)	PRESSURE		SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
			SECTION WIDTH	OVERALL DIAMETER			SINGLE/DUAL (kpa)	SINGLE/DUAL (kpa)			
10.00R20	18	TT	278	1054	149/146	3250/3000	930/930	k	7.50	18	